SCALE 1:40

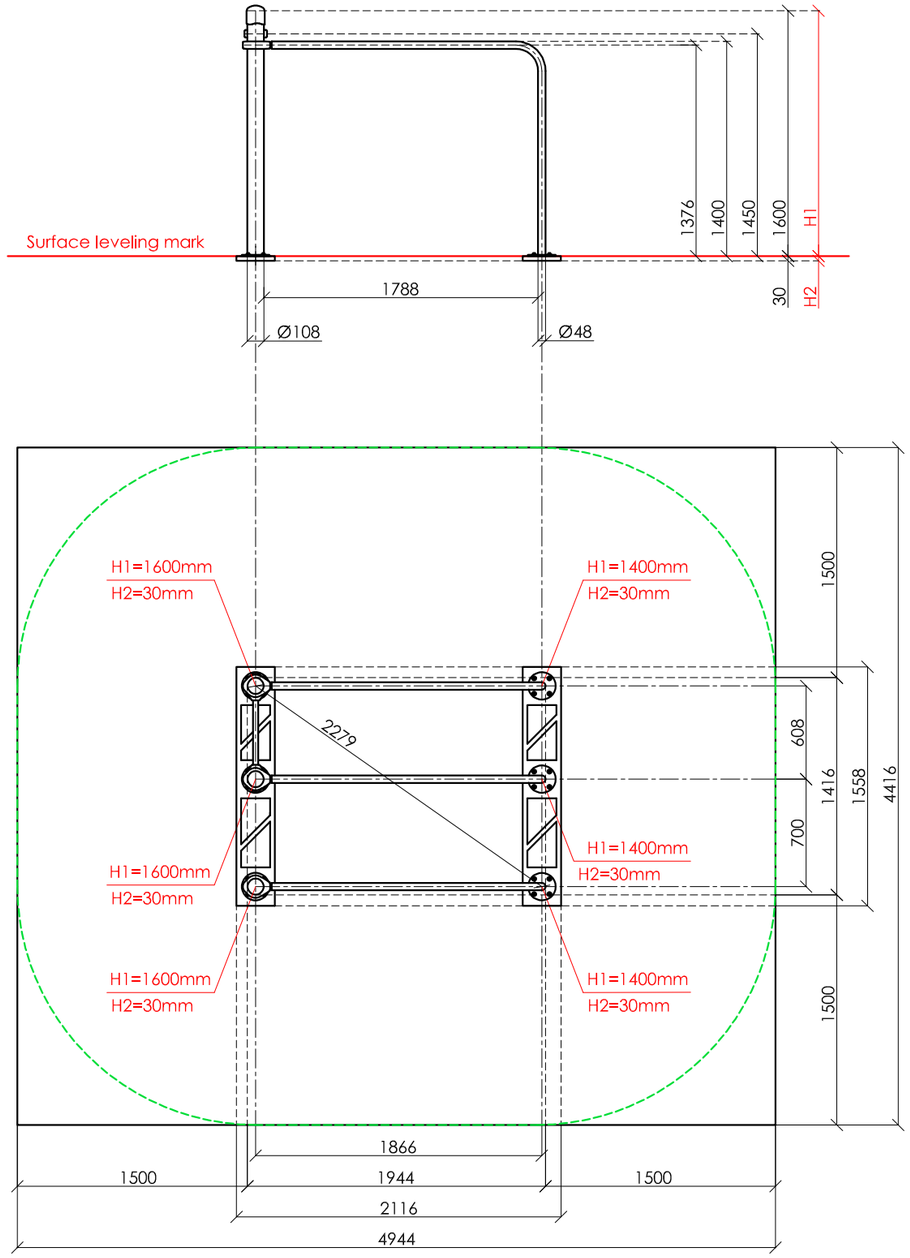

"KENGURU PRO" LTD
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

KENGURU PRO

D-1 Kenguru INDOOR

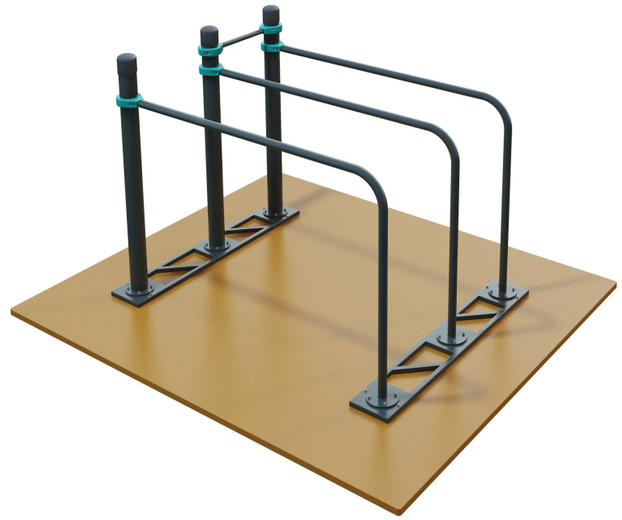

The construction consists of three columns, one crossbar 500mm in length and three curved bars that are placed parallel. The distance between the bars is 608 and 700 mm accordingly. The horizontal surface of bars is 1590 mm in length. Bars are curved on one side at the angle of 90 degrees and create the construction at the height of 1400 mm from the foundations. Construction is secured together with siluminium clamps. Complex can be ordered on stability plates or simply on flanges that must be screwed to the ground.

Technical information

width:	1558 mm (1416 mm without stability plates)	
height:	1680 mm (1650 mm without stability plates)	
lenght:	2116 mm (1944 mm without stability plates)	
largest part:	1902 mm	
weight:	183,3 kg (145,5 kg without stability plates)	
floor space required	4944 x 4416 mm	
pipe measurements:	diameter:	wall thickness:
	108 mm	3.2 mm
	48,3 mm	3.2 mm
	33,7 mm	3.2 mm
metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
metal clamps:	siluminium, powder coated, RAL 5018 (turquise blue)	
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
max. free fall height:	< 1400 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
user height:	> 140 cm	
maximum user weight:	130 kg	
certificates:		