




"KENGURU PRO" LTD

www.kengurupro.eu

Address: Lauteres street 4, Riga, Latvia, LV-1002 VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu

K-036_kids Vizhas

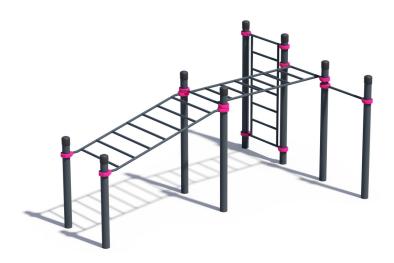

The complex consists of eight vertical columns of different heights, a crossbar 800 mm in length, a horizontal monkey bar, an inclined monkey bar and a Swedish wall. The horizontal monkey bar is 1952 mm in length and the inclined monkey bar – 2000 mm. Width of the classic monkey bars is 800 mm, distance between ach crossbar is 274 mm. Width of the inclined monkey bar is 942 mm, distance between each crossbar is 274 mm. Height of the Swedish wall is 1678 mm, width – 800 mm, distance between each crossbar is 274 mm. The complex is secured together with aluminium clamps.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!

tounaation is ne	eeaea. Use oniy	appropriate mat	eriai ana tollow t	ne installation inst	ructions closely!!!	
Foundation plan and area of movement of the K-036_kids				Technical information		
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width: height: lenght:	2832 mm 2050 mm 4134 mm	
Н3	Drop height	Н3	Drop height	largest part:	2650 mm	
40 mm	> 1.21.4 m	20 cm	< 1.0 m	weight:	275,00 kg	
50 mm	> 1.51.7 m	30 cm	< 2.0 m	floor space required	7334 x 6032 mm	
60 mm	> 1.82.0 m	40 cm	< 3.0 m	pipe measurements:	d i ameter:	wall thickness:
70 mm	> 2.12.5 m				108 mm	3.2 mm
surface leveling mark	Ø108 EF 0006	surface leveling mark loose filling material R200	Ø108 000 000 000	metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
shock absorbing underground				metal clamps:	siluminium, powder coated, RAL 4010 (Telemagenta)	
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
steel tube concrete	500	steel tube concrete	500	max. free fall height:	< 1727 mm	EN1176-1 annex I table I.1
·		1		user age:	3-14 years	
					TÜV Rheinland InterCert Kft.	