
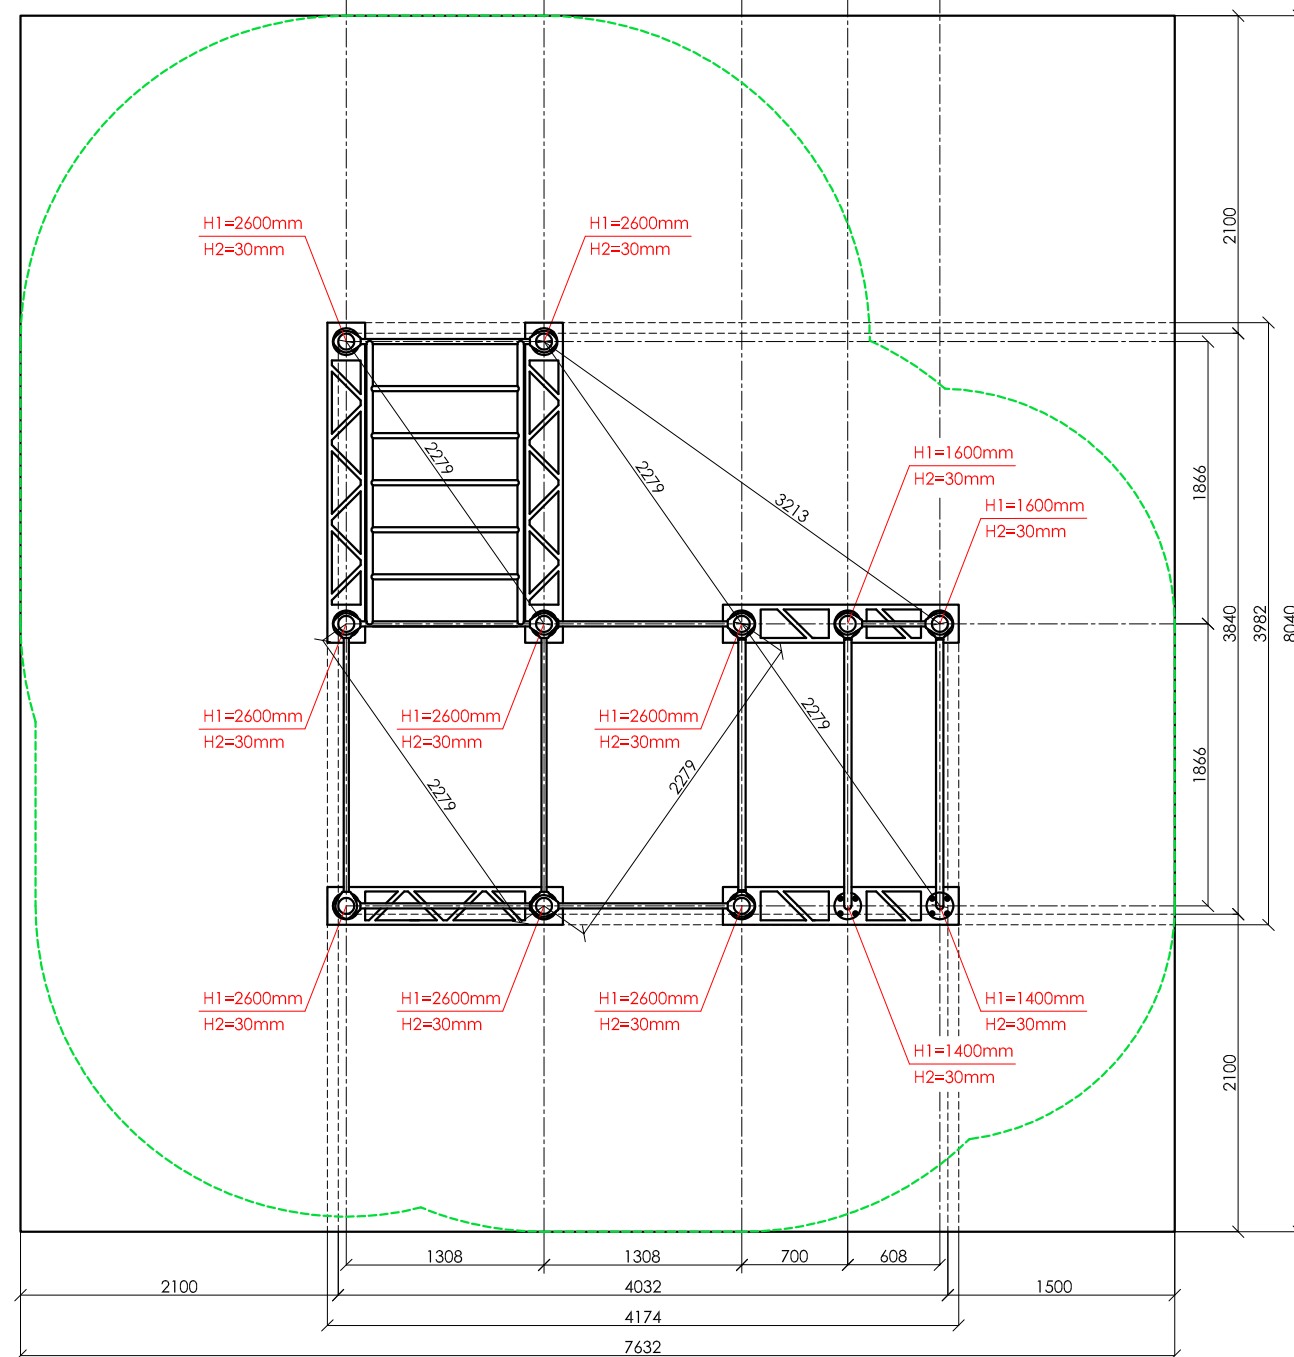
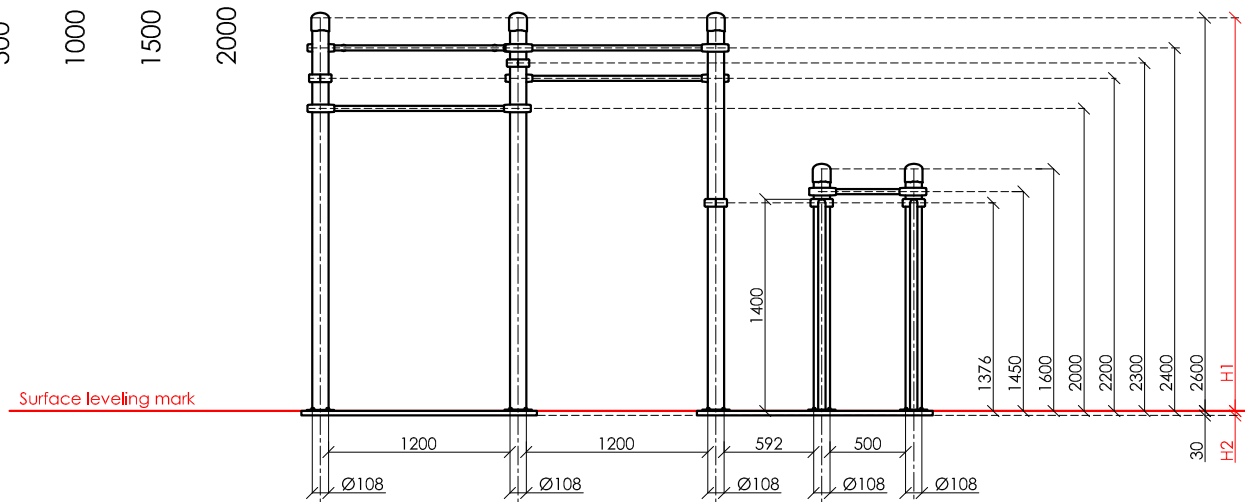


SCALE 1:50




**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

D-8

Kenguru INDOOR

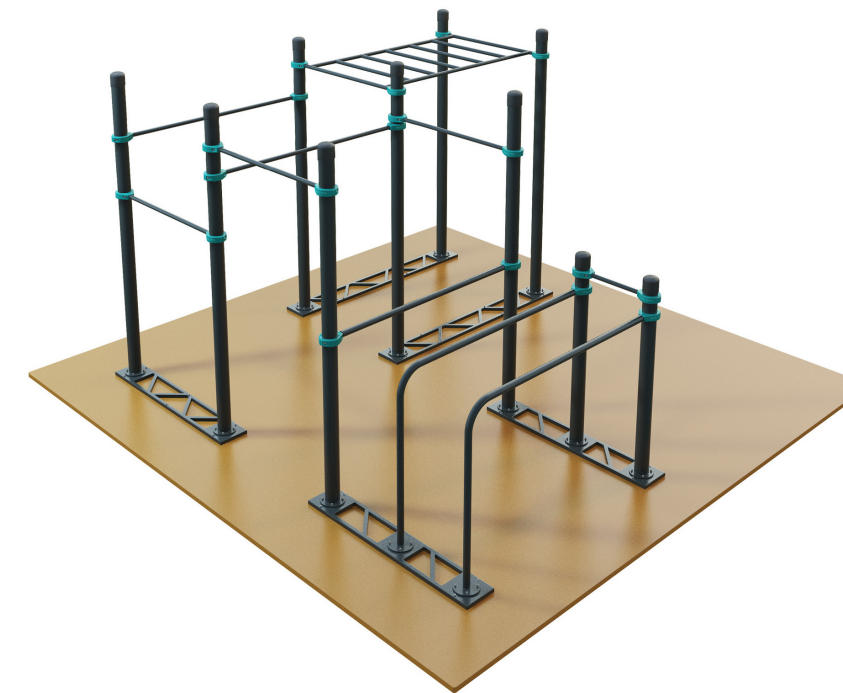

The complex consists of ten vertical columns with different height, one crossbar 500 mm in length, three crossbars 1200 mm in length, three crossbars 1758 mm in length, two curved bars and monkey bar section. Monkey bar section length is 1900 mm. The distance between the crossbars of the monkey bar is 311 mm. The distance between the curved bars is 608 and 700 mm accordingly. The horizontal surface of bars is 1590 mm in length. Bars are curved on one side at the angle of 90 degrees and create the parallel bars at the height of 1400 mm from the foundations. Construction is secured together with siluminium clamps. Complex can be ordered on stability plates or simply on flanges that must be screwed to the ground.

Technical information

| | | |
|------------------------|---|---|
| width: | 3982 mm (3840 mm without stability plates) | |
| height: | 2680 mm (2650 mm without stability plates) | |
| length: | 4174 mm (4032 mm without stability plates) | |
| largest part: | 2650 mm | |
| weight: | 460,3 kg (362,8 kg without stability plates) | |
| floor space required | 8040 x 7632 mm | |
| pipe measurements: | diameter: | wall thickness: |
| | 108 mm | 3.2 mm |
| | 48,3 mm | 3.2 mm |
| | 33,7 mm | 3.2 mm |
| metal parts: | steel, galvanized, powder coated RAL 7016 (anthracite grey) | |
| metal clamps: | siluminium, powder coated, RAL 5018 (turquoise blue) | |
| bolts for metal clamps | stainless steel, Pin Hex Button Head Security bolts M10 | |
| max. free fall height: | < 2400 mm | possible underground see DIN 79000:2012-05 Tab.2 or installation instructions |
| user height: | > 140 cm | |
| maximum user weight: | 130 kg | |
| certificates: | | |