
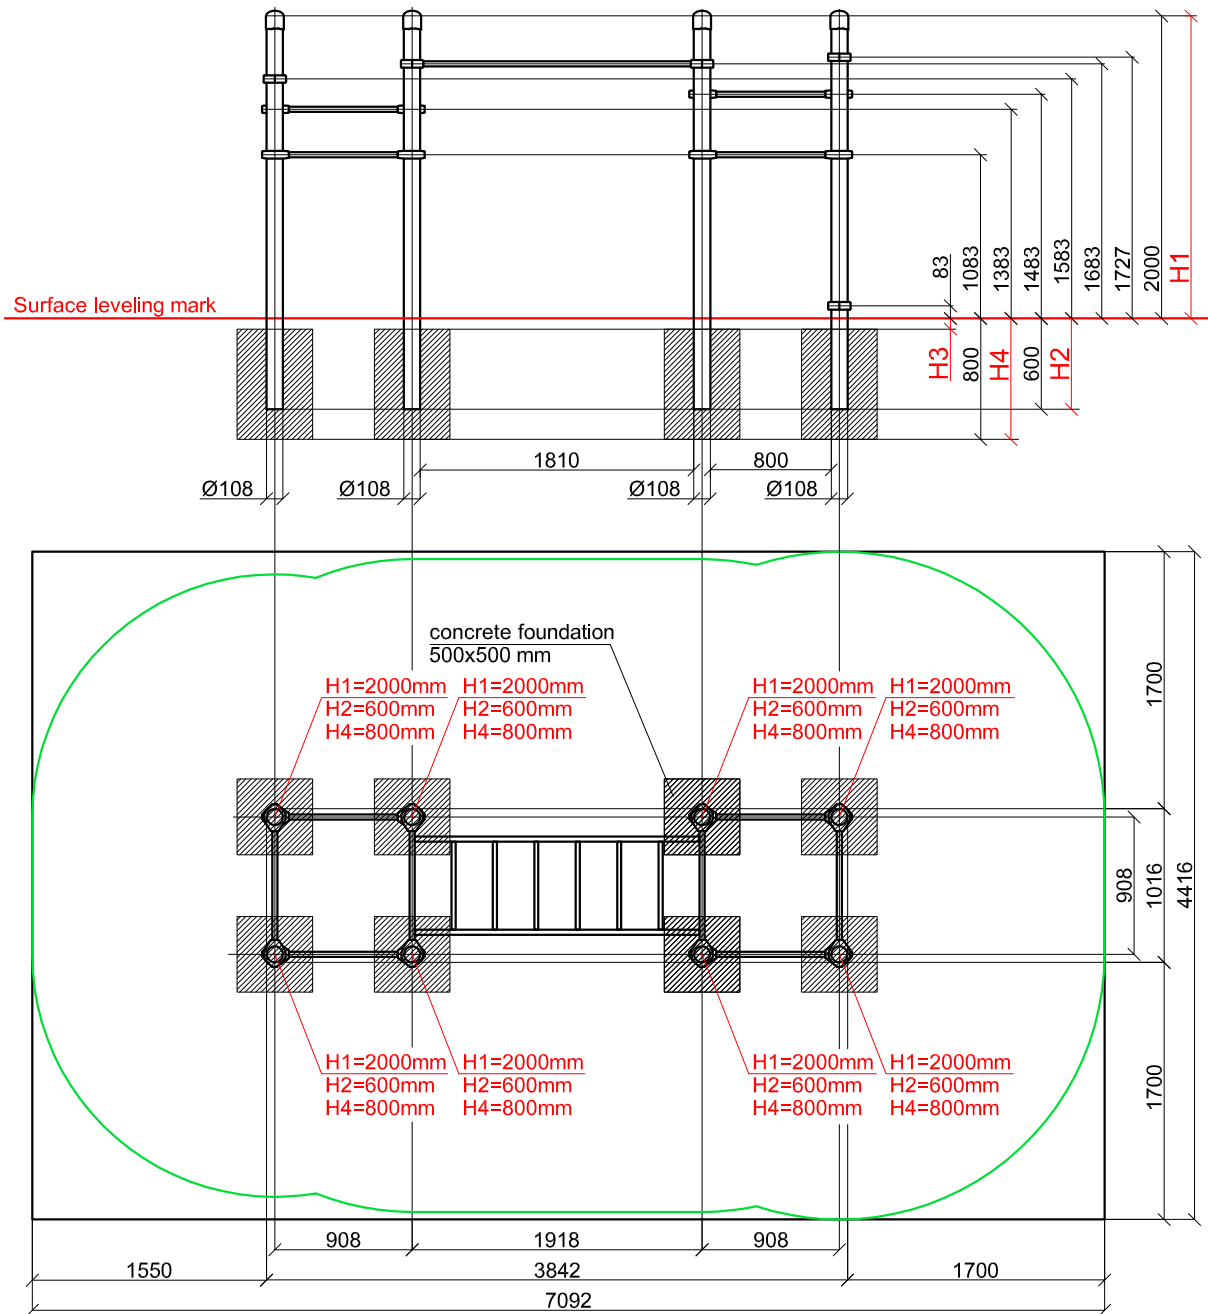


SCALE 1:50




**KENGURU
PRO**

"KENGURU PRO" LTD
Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

K-027_kids

Khatanga

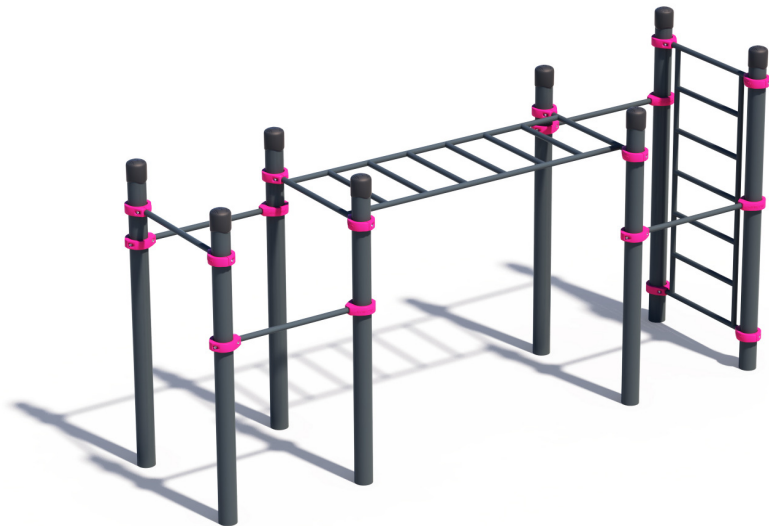

The complex consists of eight vertical columns, five crossbars 800 mm in length, a horizontal monkey bar and a Swedish wall. Length of the monkey bar is 1952 mm, width – 800 mm, distance between each crossbar is 274 mm. Height of the Swedish wall is 1678 mm, width – 800 mm, distance between each crossbar is 274 mm. The complex is secured together with aluminium clamps.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-027_kids				Technical information	
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1016 mm
				height:	2050 mm
H3		H3		length:	3842 mm
				largest part:	2650 mm
40 mm	Drop height > 1.2.....1.4 m	20 cm	Drop height < 1.0 m	weight:	270,00 kg
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	floor space required 7092 x 4416 mm	
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	pipe measurements:	diameter:
70 mm	> 2.1.....2.5 m				wall thickness:
					108 mm
					33.7mm
					3.2 mm
					3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	siluminium, powder coated, RAL 4010 (Telmagenta)
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10
				max. free fall height:	< 1727 mm
					EN1176-1 annex I table I.1
				user age:	3-14 years
				certificates:	TÜV Rheinland InterCert Kft.