
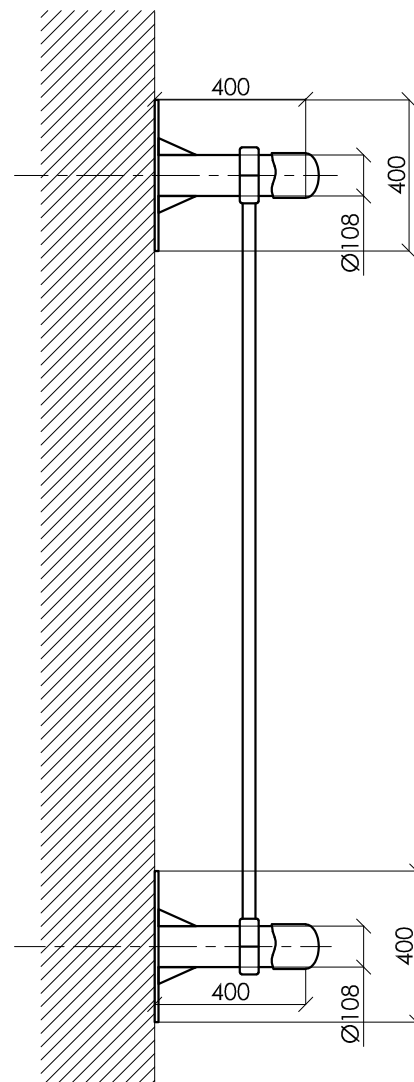
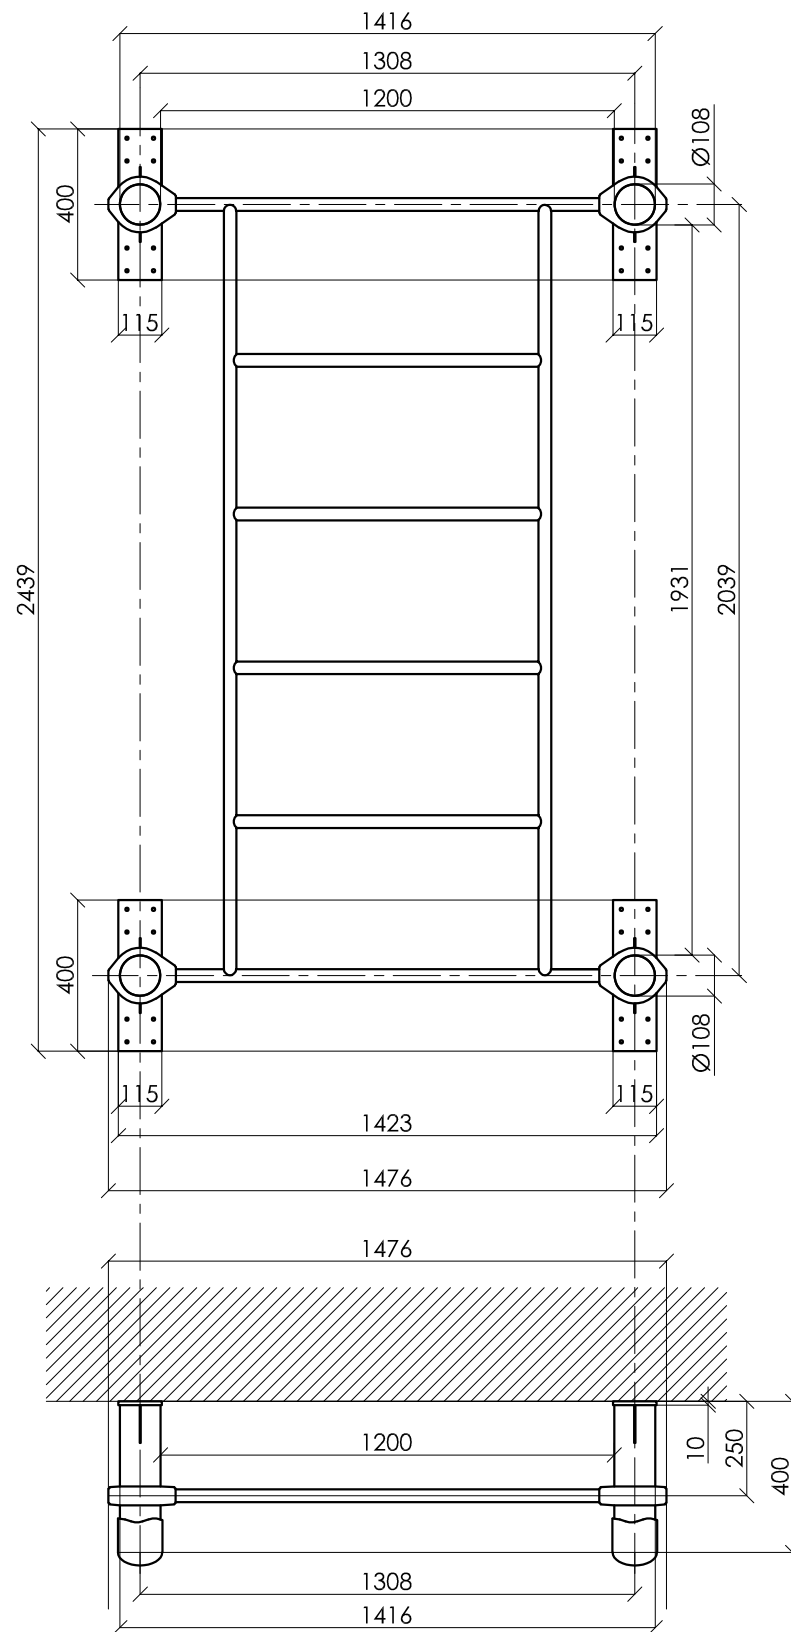


SCALE 1:20



**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

WM-004

Kenguru WALL MOUNT SWEDISH WALL



The structure consists of four horizontal 400 mm bars that are mounted to the wall with flanges and a 2073 mm high Swedish wall. Swedish wall consists of crossbars. The distance between each crossbar is 407 mm. The width of the Swedish wall is 1200 mm. The structure is secured together with siluminium clamps.

Technical information

width:	1476 mm	
height:	2439 mm	
length (distance from the wall):	max. 450mm	
largest part:	2073 mm	
weight:	77,8 kg	
installation height	according to customers wishes (optimum 2200-2500mm)	
pipe measurements:	diameter:	wall thickness:
	108 mm	3.2 mm
	33,7 mm	3.2 mm
metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
metal clamps:	siluminium, powder coated, RAL 5018 (turquoise blue)	
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
max. free fall height:	according to installation height	
user height:	> 140 cm	
maximum user weight:	130 kg	
certificates:		