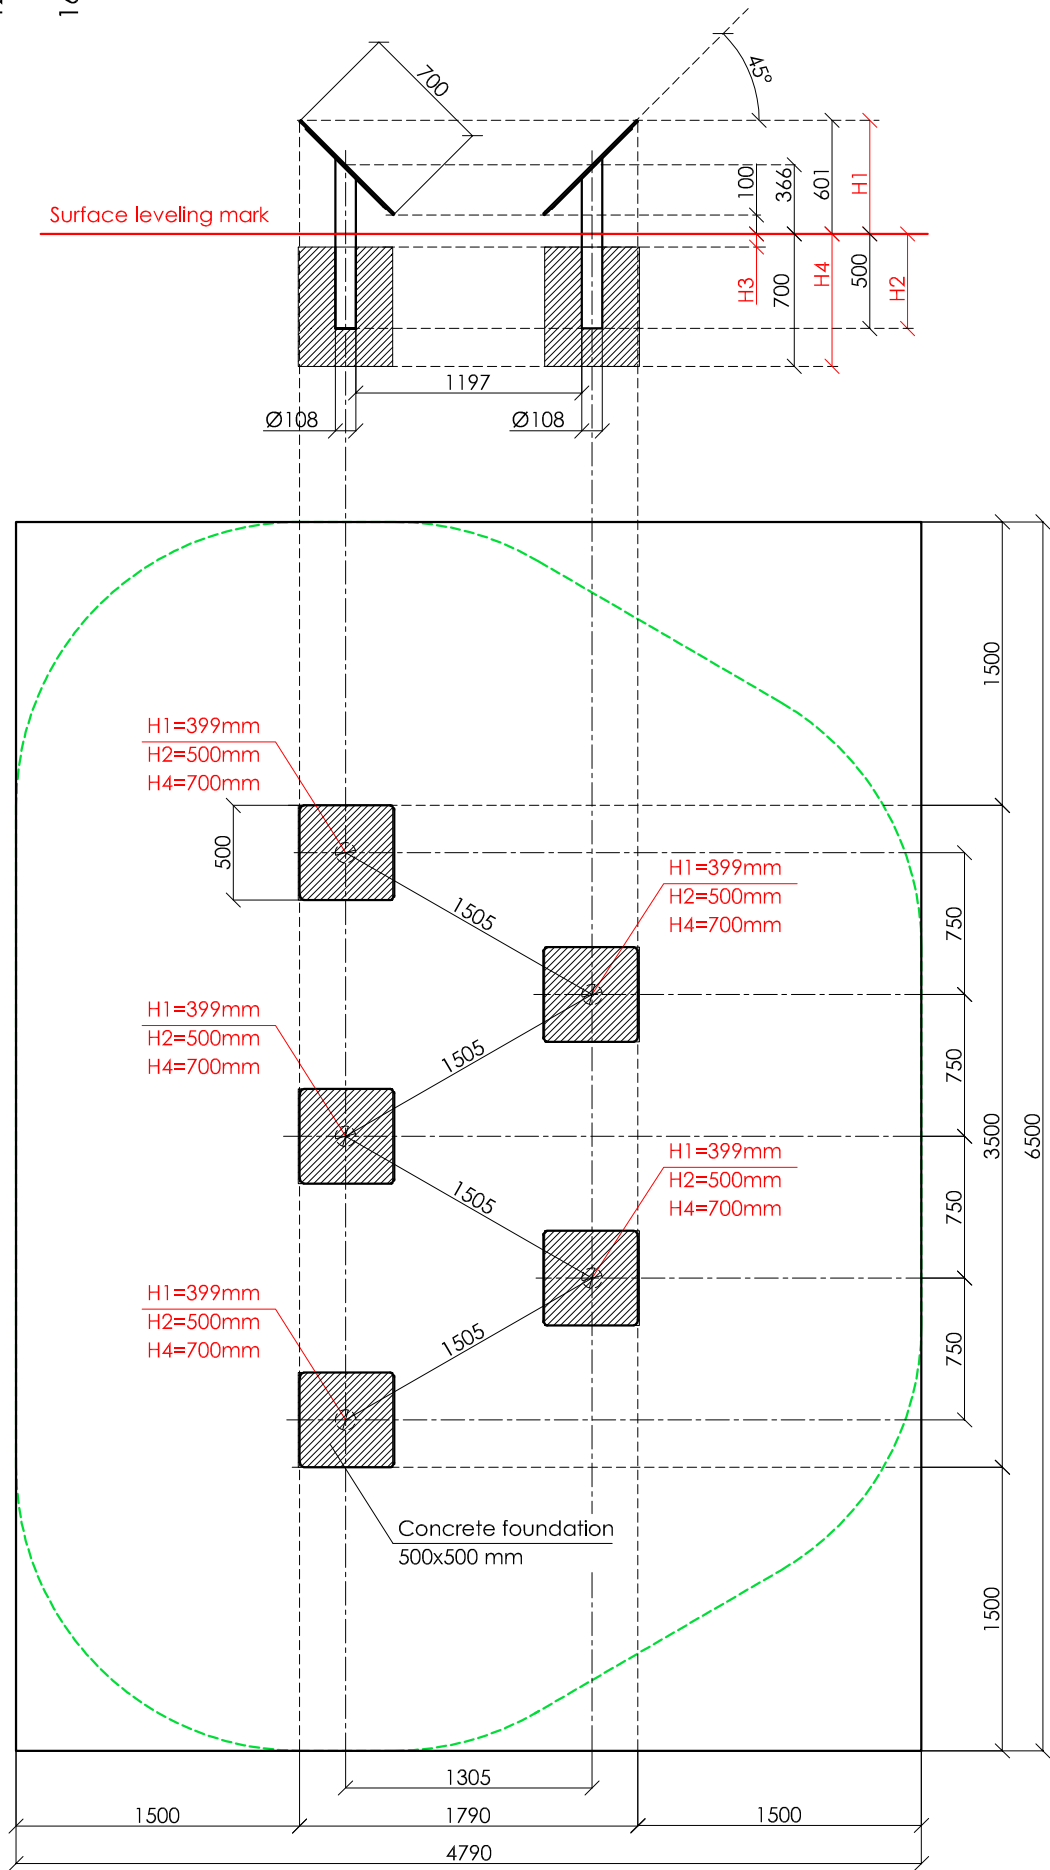



SCALE 1:40



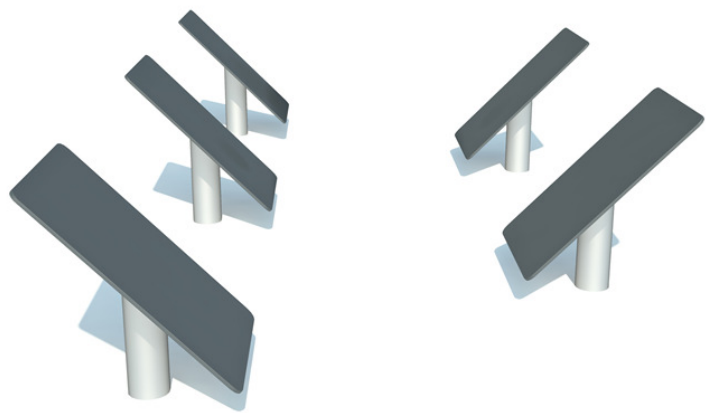
**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

OC-003

Kenguru Ninja jump

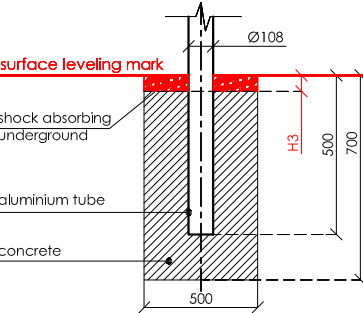
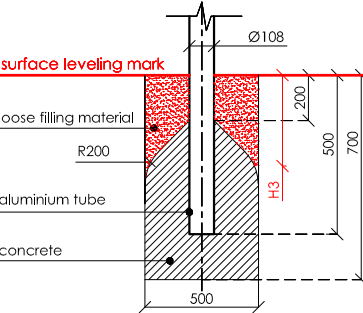
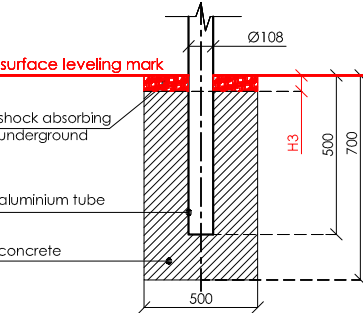
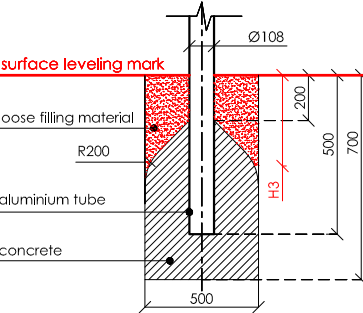


The construction consists of a aluminium structure with a jump platform which is covered with a 13mm HPL plate. Size of the platform 700x500mm. Weight 55,0 kg.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Ready-made C25 concrete should be used.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the OC-003 Kenguru Ninja jump				Technical information			
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1790 mm		
				height:	601 mm		
				length:	3500 mm		
H3	Drop height	H3	Drop height	largest part:	1101 mm		
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	weight:	55 kg		
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	floor space required	6500 x 4790 mm		
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	pipe measurements:	diameter:	wall thickness:	
70 mm	> 2.1.....2.5 m				108 mm	3.0 mm	
				metal parts:		anodized profiled aluminium tube AW6060 powder coated RAL 9006 (White aluminium)	
				Top cover specification:		13mm HPL cover	
				max. free fall height:		< 601 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:		> 140 cm	
				maximum user weight:	130 kg		