




KENGURU PRO

Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

Kenguru labyrinth

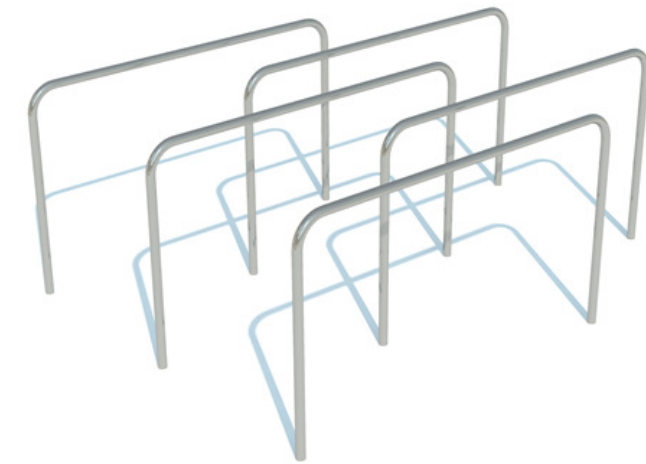

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the OC-007 Kenguru labyrinth				Technical information		
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	2040 mm	
				height:	1200 mm	
				length:	2240 mm	
				largest part:	5100 mm	
				weight:	90 kg / 18.0 kg	
				floor space required 6036x5240 mm		
				pipe measurements:	diameter:	wall thickness:
					48.3 mm	3.0 mm
				metal parts:	stainless steel AISI 304, brushed surface	
				max. free fall height:	< 1200 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm	
				maximum user weight:	130 kg	