



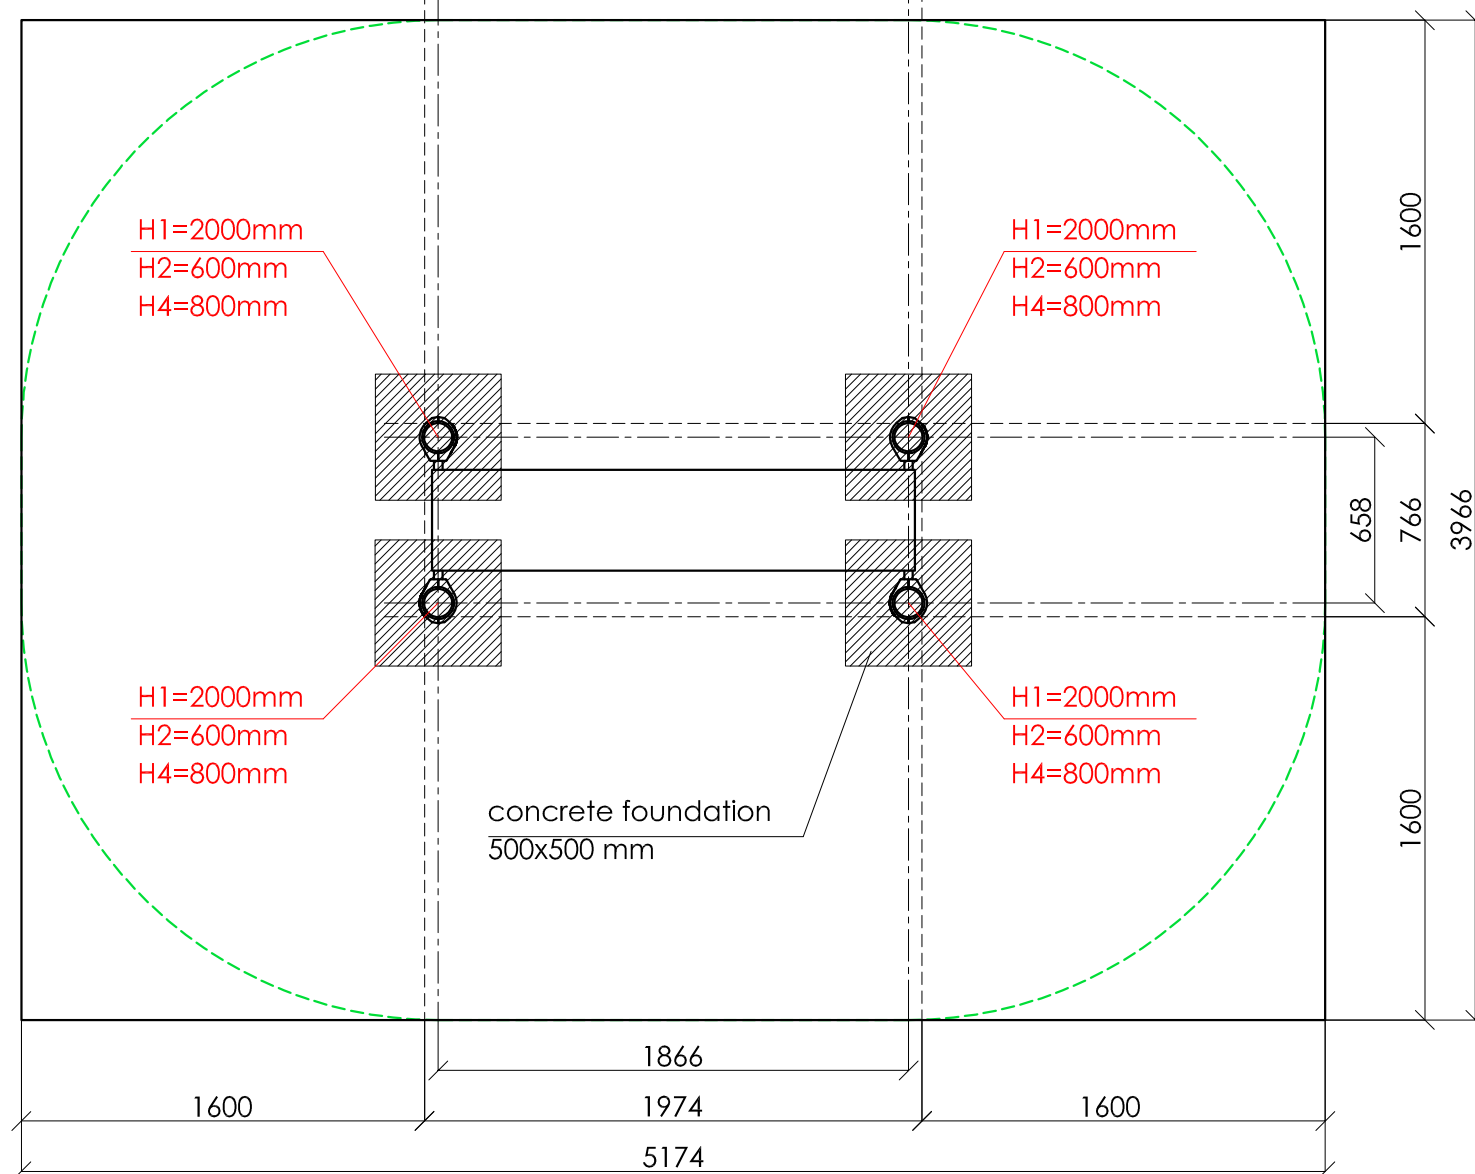

KENGURU PRO

Address: Lauteres street 4, Riga, Latvia, LV-1002
VAT Reg. No. 40103750152
Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

Multi-functional Competitive tag equipment

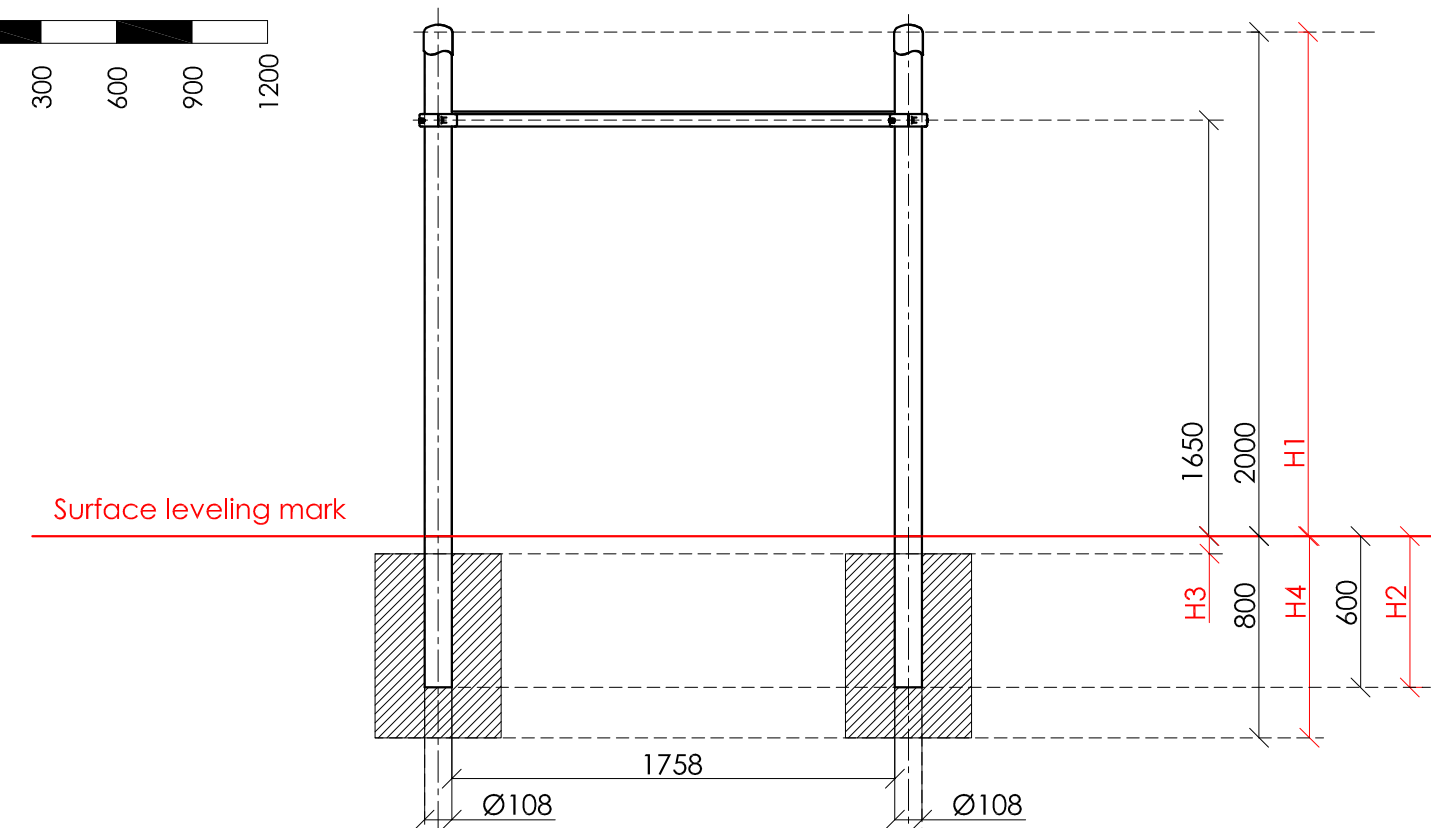

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the CT-004 Multi-functional Competitive tag equipment				Technical information		
Foundation when using Shock absorbing underground (syntethic - rubber granulates)		Beveling of foundation when using loose filling material		width:	766 mm	
				height:	2050 mm	
				length:	1974 mm	
				largest part:	2650 mm	
				weight:	60.8 kg	
				floor space required:	5174 x 3966 mm	
				pipe measurements:	diameter:	wall thickness:
					108 mm	3.0 mm
					33.7 mm	3.0 mm
				measurements of stainless profiles:	50x50 mm	
				columns Ø108mm:	anodized profiled aluminium tube AW6060 (Silver color)	
				elements:	stainless steel AISI 304, brushed surface	
				metal clamps:	siluminium, powder coated, RAL 9005 (pure black)	
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10	
				Top cover specification:	13mm HPL cover	
				max. free fall height:	< 1650 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm	
				maximum user weight:	130 kg	